

Smart Clock

Out-of-the-Box® Software

Programming Daylight Saving Time



Made in the
United States of America

Introduction

Smart Clocks with firmware chips 3.93 and above have the ability to be programmed with the Daylight Saving Time dates that occur in the Spring and Fall seasons. In order to check your Smart Clock's firmware revision, simply disconnect and reconnect its power supply. The revision number will be displayed upon start-up.




Should your revision be below 3.93, click on the hyperlink below to learn how you can prepare your Smart Clock for the time change.


<http://smartclock.descoindustries.com/DST.aspx>

Procedure


1. Open the Out-of-the-Box® Software.




2. Click Utility > Perform Clock I/O.

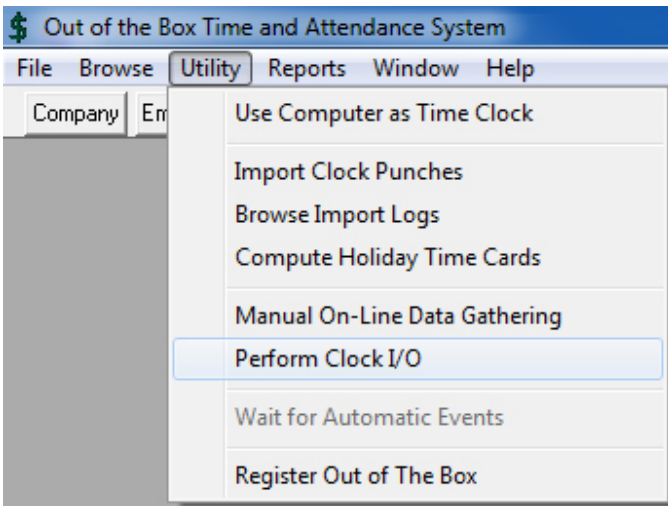

3. Select your clock number and click the Connect button.

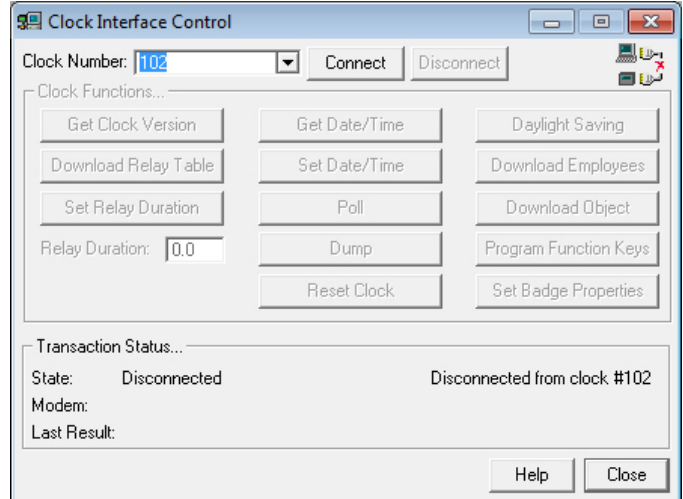

4. Click the Daylight Saving button.

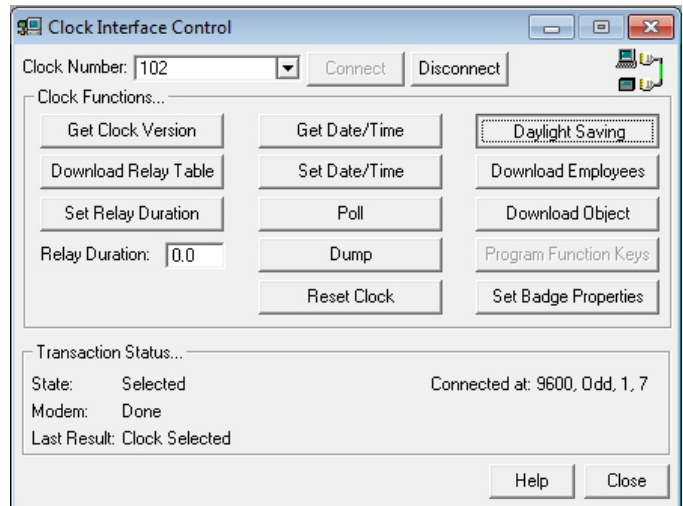

5. Enter 03/12/2017 for the Start Date and 11/05/2017 for the End Date. Click the Send to Clock button to complete the procedure. Perform this procedure for all Smart Clocks in your facility.

